



•••

Guangzhou Toksurvey Information Technology Co.,Ltd www.toknav.cn | info@toknav.cn

> Europe, North and South America Tel and WhatsApp: +1 (323) 847-7713 (lan)

Asia, Africa and Oceania Tel and WhatsApp: +86 139 2607 5986 (Jeffrey)

No. 9 Caipin Road, Building B, Room 801-6, Huangpu District, Guangzhou, China 510000



Precision Agriculture & Machine Control PRODUCT BROCHURE



- GNSS Receiver Manufacturer
- Professional OEM&ODM
- Over 15-years experience in R&D and manufacturing

ABOUT US

Company Introduction


Guangzhou Toksurvey Information Technology Co., Ltd. was founded in 2019 by a team of R&D engineers. The company team has nearly 15 years of R&D background. At present, the company has nearly 2,500 square meters of office and factory, complete set of research equipment, and strong technical background.





Our company is committed to the R&D, production and sales of high-precision satellite positioning terminal products. More than 60% of the employees are engineers. Driven by technological innovation, the company maintains a steady growth rate of 60% every year.

At present, the company has successfully launched high-precision GNSS RTK (T5 series, T10 series, T20 series, T30 series and T40 series), portable RTK receiver (P8 series), high-precision CORS station (NET660 series), data controller, GNSS antenna, precision agriculture, machine control, and marking robot to the market. We not only provide positioning products, but also provide a series of application solutions.

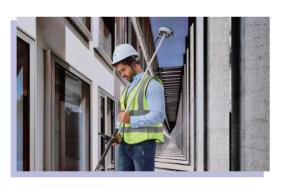



Our Targets





Make positioning more precise and







easier.

Working together to improve global surveying quality.

To become a leader in the global surveying and mapping service. Your reliable supplier in positioning!

Mission

Vision

Value

Slogan

Fields of Application

TOKNAV products can be widely used in precision surveying & mapping, mining operations, deformation monitoring, autonomous driving and other fields. We currently have a number of mature GNSS application solutions, such as deformation monitoring, CORS network, marking robots, precision agriculture, machine control etc. TOKNAV products have passed CE, FCC, KC, NGS, IGS and other certifications, Mapping & GIS and are exported to more than 70 countries and regions around the world. Our products are well received in the global market, and now we have become a system integration supplier in the global market.



Construction












Certifications

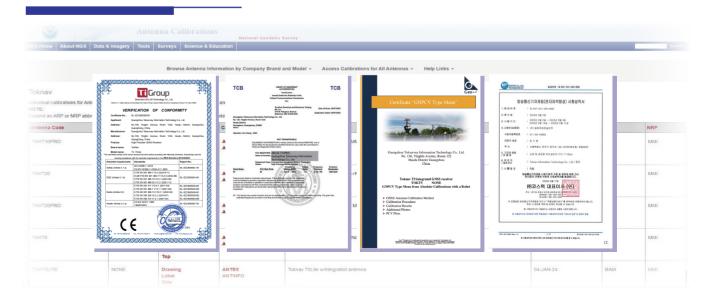





TAG66 is an electric steering wheel autonomous driving system. It obtains centimeter-level vehicle positioning through BeiDou high-precision positioning and adjusts the vehicle's direction through an advanced DC servo motor solution. This autonomous steering system uses an integrated controller that combines a 4G module, IMU sensor, UHF radio, and BeiDou positioning module to achieve high-precision autonomous driving. It is suitable for agricultural activities such as sowing, harvesting, spraying, mulching, plowing, and ridge making. It can effectively improve work efficiency and yield while saving fuel, seed, and labor costs.













CHARACTERISTIC

Integrated Controller Design

This autonomous steering system uses an integrated controller that combines a 4G, IMU sensor, UHF radio, and BeiDou positioning modules, making it easy to install and transfer between vehicles. There is no need to install additional wheel angle sensors, making installation even easier.

High Precision

The system provides industry-standard RTK precision, combining BeiDou positioning with INS terrain compensation to ensure a pass precision of 2.5cm even in difficult agricultural terrains. This level of precision and accuracy is valuable for various agricultural activities such as plowing, sowing, and harvesting. By eliminating overlaps and skips, it can increase yield while saving fuel, seeds, and time.

Excellent Performance

The system easily maintains a precision of \pm 2.5cm within a speed range of 0.15 to 25 kilometers per hour. With high-precision algorithms, it is very suitable for sowing, planting, spraying, plowing, and other ground operations.

All-in-One Features

Compatible with various operating modes, including AB line, A+ line, custom curves, and angle harrowing. It supports work area statistics, work trajectory recording, data upload and download, and shared operation modes among multiple vehicles.

Easy to Use

With the convenient installation, users can activate common functions in just a few steps, allowing them to get started quickly and learn on the go.

System composition





Electric steering wheel

Intelligent Display Screen



TAG66

Electric Steering Wheel Autonomous Driving System



- Supports receiving external RTK corrections via UHF radio.
- Supports wheel angle sensor mode required for specific farm operations.
- Supports secondary development for tighter integration of components.

SPECIFICATION

RE	CEIVER
GPS	L1, L2, L5
GLONASS	L1, L2
GALILEO	E1, E5a, E5b
BDS	B1, B2, B3
Accuracy (RTK)	Horizontal: ±8mm +1ppm RMS Vertical: ±15mm +1ppm RMS
Working Temperature	-20°C ~+70°C
Storage Temperature	-40°C ~+80°C
Size	159*56 mm
Network	2G/3G/4G
Dust and Waterproof	IP69K

VEHICLE MOU	INTED COMPUTER
Display Screen	10.1-inch, Support 5-point capacitive touth
Brightness	750cd/m2
Resolution	1024*600px
1/0	RS232*2 RS485*1 CAN*1/2
Communication	4G WiFi 2.4G BT 4.2, BLE USB 2.0*1
Operating Temperature	-30°C ~ +70°C
Storage Temperature	-40°C ~ +85°C
Protection Level	IP65
Work Humidity	Humidity 95%, non-condensing
Vibration standard (Operational)	MIL-STD-810
Impact standard (Operational)	ISO16750
Power	5-36V DC Input ACC, State detection for ignition

AUTO-STEERING SYSTEM		
Rated Torque	7.5 N·m	
Max RPM	180 RPM	
Rated Current	15A	
I/O	1×CAN	
Power	(9-32) VDC	
Motor Dimensions	165mm × 80.5mm	
Steering Wheel Diameter	D: 410mm	
Operating Temperature	-20°C ~ +70°C	
Storage Temperature	-40°C ~ +85°C	
Dust & Waterproof Rating	IP65	
CAMERA		

CAMERA		
Power Supply	DC12V ±5%	
Viewing Angle	120°	
Resolution	1280(H) × 720(V)	
Dust & Waterproof Rating	IP65	
Operating Temperature	-20°C ~ +70°C	
Storage Temperature	-40°C ~ +85°C	
ACCESSODIES		

ACCESSORIES		
Receiver	1PCS	
Tablet	1PCS	
Steering Wheel	1PCS	
Motor and Driver	1PCS	
Main Cable	1PCS	
Tablet Power Cable	1PCS	
Screw Accessories Pack	1PCS	
Mount	1PCS	
Camera (Optional)	1PCS	

Manufacturers may update parameters at any time, please refer to the latest product information.

TAG88

Automated GNSS Land Leveling System





TAG88 Automated GNSS Land Leveling System is a satellite positioning-based, fully automated control system for high-precision land leveling with agricultural machinery. It features 24-hour operation, a 30-kilometer coverage radius, and eliminates the need for frequent base station relocation. The system supports simultaneous operation of multiple units. Through real-time display of fill and cut volumes and automatic adjustment of the land leveler's position and attitude, it enables construction without prior staking, ensuring rapid and accurate task completion even in complex terrains, thereby enhancing efficiency, reducing rework, and increasing economic benefits.















CHARACTERISTIC

Full Network Signal Coverage

The system integrates Beidou satellite, compatible with GPS, BDS, GALILEO, and GLONASS signals. The base station covers a maximum radius of 30 km, reducing the hassle of base station relocation and enabling simultaneous operation of multiple devices.

Intelligent Display Screen

10.1-inch high-definition display with instant multi-touch response. Protection against contamination and dust, as well as resistance to shock, magnetism, and electromagnetic interference, ensuring stable performance.

Multitasking: Adaptable to Various Grading Tools

The system includes tractor navigation, compatible with telescopic, ripper, paddy leveling blades, scrapers, and graders for tasks like ridging, slope scraping, and farmland leveling.

24-Hour Continuous Operation

The system supports 24-hour continuous operation, capable of working in various adverse weather conditions, including daytime, nighttime, strong winds, sandstorms, and smog.

Real-time Map Visualization

Users can monitor operation trajectories and terrain elevations via the software, design operation routes, and achieve an intuitive understanding of the work process.

Automatic Terrain Recognition and Adjustment

The system automatically identifies terrain variations and adjusts the plot datum, achieving an operation accuracy of ± 2.5 cm. It can level both flat and sloped surfaces, increasing operation efficiency by 20%.

System composition







Electronic Control Unit





TAG88

Automated GNSS Land Leveling System



- The system automatically identifies terrain variations and adjusts the plot datum.
- Achieving an operation accuracy of ± 2.5 cm.
- 24-Hour Continuous Operation.

SPECIFICATION

SATELLITE SYSTEM		
BDS	B1I, B2I, B3I, B1C, B2a, B2b*	
GPS	L1, L2, L5	
GLONASS	L1, L2, L3	
GALILEO	E1, E5a, E5b, E6	
QZSS	L1, L2, L5, L6	
IRNSS	L5	
I-Rand		

WORKING ENVIRONMENT

 $\begin{tabular}{lll} & Operating Temperature: & -40^{\circ}C \sim +85^{\circ}C \\ & Storage Temperature: & -55^{\circ}C \sim +85^{\circ}C \\ & Complies with national standards \\ & GBT-3871, GBT-2423, \\ & and GBT-28046 for vehicle \\ & vibration standards \\ \end{tabular}$

VEHICLE MOUNTED COMPUTER

Display Screen	10.1-inch, Support 5-point capacitive touth
Brightness	750cd/m2
Resolution	1024*600px
I/O	RS232*2 RS485*1 CAN*1/2
Communication	4G WiFi 2.4G BT 4.2, BLE USB 2.0*1
Operating Temperature	-30°C ~ +70°C
Storage Temperature	-40°C ~ +85°C
Protection Level	IP65
Work Humidity	Humidity 95%, non-condensing

Vibration standard (Operational) MIL-STD-810 Impact standard (Operational) ISO16750

Power 5-36V DC Input ACC, State detection for ignition

ECU CONTROLLER

 Dimensions(L*W*H)
 16cm* 10.8cm*4.5cm

 Input Voltage
 9-36V

Hydraulic Output Voltage 12V

Description

A highly integrated leveling control unit and radio communication unit. The leveling control unit is equipped with an on-board ARM processor and industrial-grade communication chip, ensuring stable performance and robust anti-interference capability. The radio communication unit incorporates mainstream measurement-grade communication modules, compatible with domestic and international standard measurement base stations.

ACCESSORIES

Tablet	1PCS	
ECU	1PCS	
Gnss antenna	1PCS	
Hydraulic control valve	1PCS	
Tablet Holder	1PCS	
Power cable	1PCS	
Hydraulic valve cable	1PCS	
Gnss antenna cable	1PCS	

Manufacturers may update parameters at any time, please refer to the latest product information.



TMC10

Dozer 3D Guidance System





TMC10 Dozer 3D Guidance System pairs high-precision BeiDou GNSS technology with construction machinery. It precisely tracks the blade's position and orientation, aligning with 3D digital plans to guide users via digital readouts or indicators. Utilizing global navigation and embedded technology, the system offers real-time control over dozing tasks, boosting accuracy, efficiency, and safety. It's ideal for road and rail grading, dam construction, riverbed leveling, and land preparation in large-scale projects and agriculture.













CHARACTERISTIC

High Precision

The system leverages GNSS positioning and sensor fusion, integrated with modeling algorithms and electro-hydraulic controls, for centimeter-accurate control, enhancing performance.

24-Hour Continuous Operation

The system supports 24-hour continuous operation and allows reliable operation at night.

Real-time Monitoring and Control

The system uses cutting-edge sensors to track the blade's status and the worksite environment continuously. This data feeds into the control system for precise blade management, keeping operations at peak efficiency.

Stakeless Operation with Increased Efficiency

The system integrates algorithms with 3D plans for digital guidance, removing the need for professional surveyors. It enables quick bulldozer leveling, saving labor costs and boosting efficiency by over 50%.

Easy Installation and Operation

Featuring straightforward installation and intuitive operation, it's easy for users can quickly become proficient.

System composition








T®KN2V

TMC10 Dozer 3D Guidance System

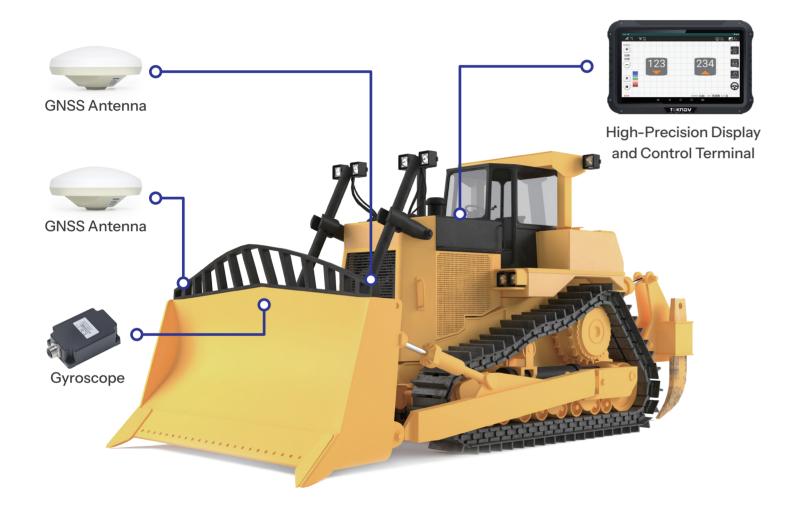

- Manages blade lift with solenoid valves guided by navigation data.
- Achieves 2 cm accuracy in positioning.
- Facilitates the conversion and import of design specifications.

SPECIFICATION

SATELLITE SYSTEM		
BDS	B1I, B2I, B3I, B1C, B2a, B2b*	
GPS	L1, L2, L5	
GLONASS	L1, L2, L3	
GALILEO	E1, E5a, E5b, E6	
QZSS	L1, L2, L5, L6	
IRNSS	L5	
L-Band		

VAIC	ועמל	NC E	NVIRO		
VV	JKNI	NGE	NVIRU	JINIVIE	- 171

Environment	Operating Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Storage Temperature: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$	
Vibration Standards	Complies with national standards GBT-3871, GBT-2423, and GBT-28046 for vehicle vibration standards	
VEHICLE MOUNTED COMPUTER		

VEHICLE MOU	JNTED COMPUTER
Display Screen	10.1-inch, Support 5-point capacitive touth

Brightness	750cd/m2
Resolution	1024*600px
I/O	RS232*2 RS485*1 CAN*1/2
	40

WiFi 2.4G Communication BT 4.2, BLE USB 2.0*1

Operating Temperature -30°C ~ +70°C Storage Temperature -40°C ~ +85°C

IP65 Protection Level

Work Humidity Humidity 95%, non-condensing

Vibration standard MIL-STD-810 (Operational)

Impact standard ISO16750 (Operational)

5-36V DC Input Power ACC, State detection for ignition

GYROSCOPE

Range ±400°/s

0.000055(°/s)/(LSB) LSB Condition: ±400°/s

±1°/s Zero-drift at Rest Condition: Horizontal Placement ±5 (°/s)/°C Temperature Drift Condition: -40°C~+85°C 10s Smoothing 2.03°/h (Zero Bias Stability) Condition: Horizontal Static Placemen Allan Variance 1.80°/h (Zero Bias Instability) Condition: Horizontal Static Placement

HEADING ANGLE Z: ± 180°

0.1° **Heading Accuracy** 0.0055° LSB Condition: Horizontal Placement

Range

MODULE

4800bps~230400bps Communication Interface Condition: UART Default: 115200bps **Output Content** Angular Velocity, Angle 0.2Hz ~ 500Hz **Output Rate** Default: 10Hz

Stratup Time 1000ms (Max Value) Operating Temperature -40°C~85°C Storage Temperature -40°C~100°C

ELECTRICAL PARAMETERS

3.3V~5.5V Supply Voltage Typical: 5V 9.5mA (Typical) **Operating Current** Condition: Operating (5V)

ACCESSORIES

Tablet 1PCS ECU 1PCS 1PCS Gyroscope **GNSS Antenna** 2 PCS Main Cable 1PCS Data Cable 1PCS **Tablet Power Cable** 1PCS 2 PCS Antenna harness 1PCS Mount Screw Accessories Pack 1PCS 1PCS Support Rod Kit

www.toknav.cn info@toknav.cn

Manufacturers may update parameters at any time, please refer to the latest product information.

TMC20

Excavator Guidance System





TMC20 is an efficient excavator guidance system. It utilizes BeiDou satellite positioning to provide construction workers with intuitive real-time graphical and numerical information, enabling more precise and efficient construction. This system is suitable for various engineering scenarios, such as underwater riverbed excavation, riverbed dredging, riverbank slope trimming, and high-speed track construction at test sites. It can significantly reduce the number of on-site auxiliary personnel, achieve one-person-one-machine construction, and lower labor costs. It is a powerful tool for improving construction quality and efficiency.













CHARACTERISTIC

High-Precision Intelligent Display Screen

This industrial-grade vehicle-mounted computer is designed for rugged durability. It features an integrated high-precision GNSS module for accurate positioning and orientation. With an IP66 protection rating and superior shock resistance, it's built to withstand tough conditions. The device supports multiple communication methods, including dual-SIM full-network connectivity. Its high-resolution, high-brightness screen ensures clear visibility, making it ideal for a range of demanding work environments.

Dynamic IMU Sensor

This dynamic IMU sensor offers high precision and consistency in motion sensing, along with an ultra-wide temperature range. It's designed to meet the stringent environmental demands of engineering applications.

High Precision

TMC20 has a planar accuracy of up to 2cm, and a high accuracy of 3cm for fill and dig volumes. The high-precision guidance system reduces the risk of rework due to under-digging or over-digging. It meets various construction requirements (such as underwater riverbed excavation, riverbed dredging, riverbank slope trimming, high-speed track construction at test sites, etc.), and the construction quality is further enhanced.

Multi-Scenario Application

Through inertial navigation and tilt sensing technology, combined with centimeter-level high-precision positioning, it obtains the three-dimensional coordinates of the boom, arm, and bucket to achieve precise construction guidance in all-weather and all-scenario conditions, such as ditch digging, slope trimming, riverbed excavation, night, rain, snow, and heavy fog.

System composition








Dynamic IMU Sensor

TMC20

Excavator Guidance System

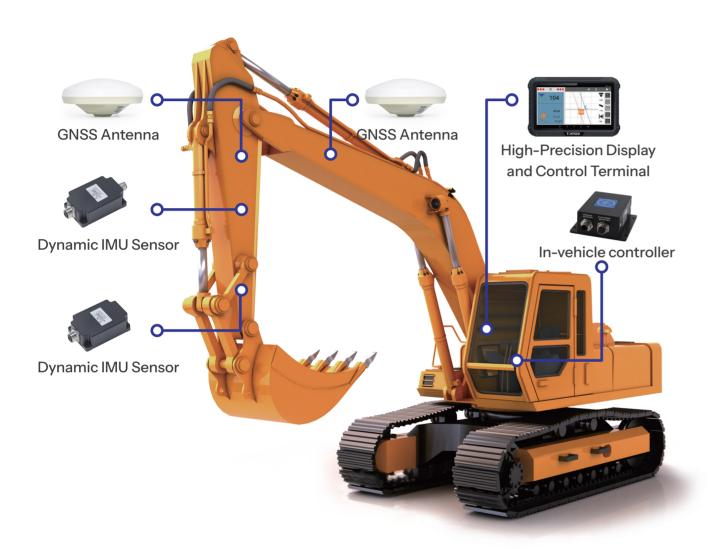

- Reduce rework costs due to over-digging and under-digging, save fuel, and reduce costs.
- Construction is possible 24 hours a day, day and night.
- Automatically calculates the area, making the working area clear at a glance.



SPECIFICATION

SATELLITE SYSTEM		
BDS	B1I, B2I, B3I, B1C, B2a, B2b*	
GPS	L1, L2, L5	
GLONASS	L1, L2, L3	
GALILEO	E1, E5a, E5b, E6	
QZSS	L1, L2, L5, L6	
IRNSS	L5	
L-Band		

WORKING ENVIRONMENT

Environment	-40°C ~ +85°C Storage Temperature: -55°C ~ +85°C Complies with national standard	
Vibration Standards	GBT-3871, GBT-2423, and GBT-28046 for vehicle vibration standards	
VELUCIE MOUNTED COMPUTED		

VEHICLE MOU	INTED COMPUTER
Display Screen	10.1-inch, Support 5-point capacitive touth
Brightness	750cd/m2
Resolution	1024*600px
I/O	RS232*2 RS485*1 CAN*1/2
Communication	4G WiFi 2.4G BT 4.2, BLE USB 2.0*1
Operating Temperature	-30°C ~ +70°C
Storage Temperature	-40°C~+85°C
Protection Level	IP65
Work Humidity	Humidity 95%, non-condensing
Vibration standard (Operational)	MIL-STD-810
Impact standard (Operational)	ISO16750
Power	5-36V DC Input ACC, State detection for ignition

SENSOR PE	RFORMANCE
Angle Measurement Range	Pitch Angle: ±80° Roll Angle: ±180°
Angle Repeatability	<0.05°
Angular Velocity Measurement Range	±450°/s
LSB	0.01°
Dynamic Accuracy	0.7°
Acceleration Measurement Range	±6g
Update Rate	100Hz
Voltage Input	9-36 V
Power Consumption	0.1-0.24W
Interfaces	CAN/RS-485/RS-232/TTL
Connector Model	GX12 - 4 Pin (Male)
Product Dimensions	37.65524mm
Waterproof Rating	IP68
Operating Temperature	-40~85°C
Storage Temperature	-40~85°C
ACCES	SSORIES
Tablet	1Unit
Gnss Antenna	2 PCS
Dynamic IMU Sensor	2 PCS
In-vehicle controller	1PCS
Satellite Antenna Cable	2 PCS
Satellite Antenna Extension	1PCS
Main Cable	1PCS
Gyro Cable	1PCS

1PCS

1PCS



Radio Antenna(Optional)

Mounting Pack

Tablet bracket

Manufacturers may update parameters at any time, please refer to the latest product information.